


AUTOMATIC DRAIN PLUG INSTRUCTIONS




INSTRUCTIONS:

1. Attach the Stopper to the Drain Tube body as shown

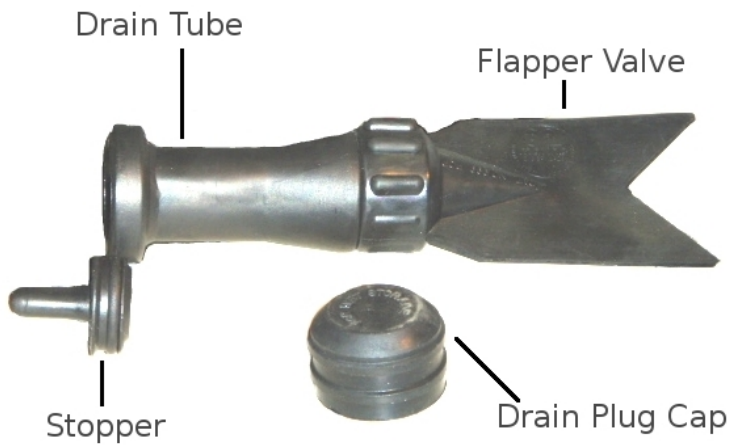


2. Insert the Drain Tube into the transom drain hole with the stopper end inside the boat's hull, notched end outside (if Drain Tube fits too tightly, wet with warm soapy water).

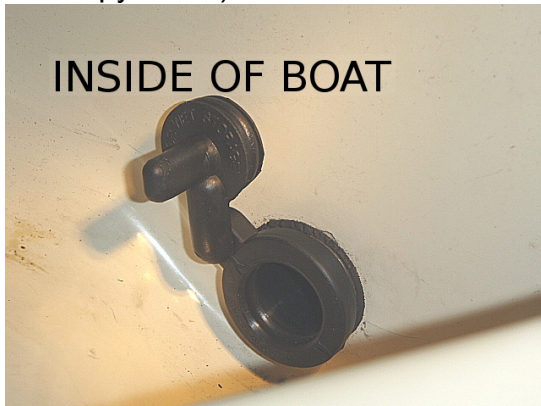

3. Attach Flapper Valve to the notched end of the Drain Tube protruding outside the boat's hull.



4. When boat is underway, leave Stopper open. For wet storage, either replace the Flapper Valve with the Drain Plug cap, or plug the other end by closing the Stopper.

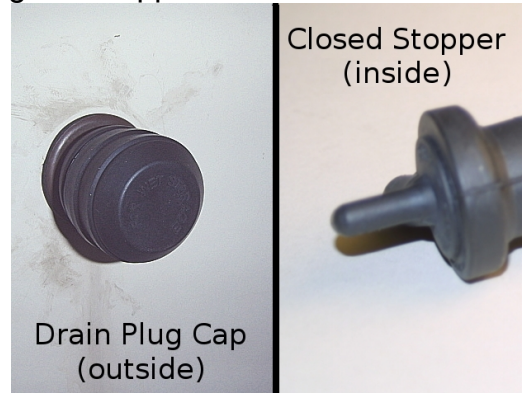

WARRANTY INFORMATION

Custom Rubber Corp. makes no and disclaims all express or implied warranties other than warranties set forth herein, including, without limitation, the warranties of merchantability, fitness for a particular purpose, or from any course of dealing or trade usage.

Custom Rubber Corp. shall not be liable for special, indirect, incidental, punitive or consequential damages, including, without limitation, damages for loss of opportunity or business profits, business interruption or any other loss even if Custom Rubber Corp. has been advised of the possibility of such damages.

All products and services sold or provided by Custom Rubber Corp. are subject to Custom Rubber Corp.'s standard terms and conditions, which may be found at

<http://www.customrubbercorp.com/top.htm>

<http://www.customrubbercorp.com/tos.htm>

In no event shall Custom Rubber Corp. be liable for any amount in excess of the purchase price paid.